


Slim vertical mount air conditioner - 1200 to 1800 BTU

The **IQ1200VS** slim vertical mount air conditioners are used to reduce heat accumulation within enclosures and maintain a safe operating temperature. These units use closed-loop cooling technology, which removes heat without letting outside air into the sealed enclosure. All units feature a digital program-


ble temperature controller with an alarm. The air conditioners feature a rugged 16 GA welded steel, dent resistant cabinet construction. The units have a space saving aesthetic cabinet design. A built-in condensate evaporation package is included. The units are powered by an efficient, quiet and long lasting rotary compres-

or, with a CFC-free refrigeration system. All units are factory tested and are designed to mount on the side of an enclosure, while maintaining NEMA 12 integrity. Units are ANSI/ASA 61 gray or brushed stainless steel.
UL / ULc Listed, NEMA 12 / IP54
Steel units: NEMA 4 w/N4GK kit
SS units: NEMA 4X w/N4GK kit

AIR FLOW DIAGRAM

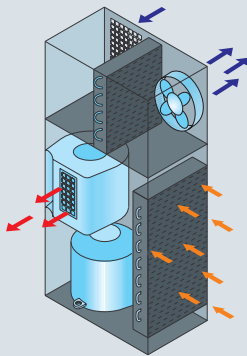

CUT-OUT DRAWING

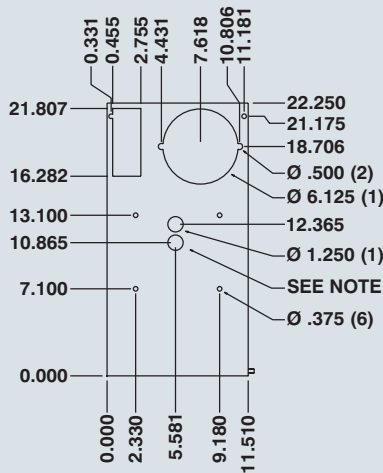

NOTE: Ø 1.250 HOLE FOR OPTIONAL EXTERNAL HEAT OUTPUT



Unit shown above is custom-painted 'Jet Black'. Standard units are painted ANSI 61 gray or brushed stainless steel. Other custom colors, such as beige, are also available.

CATALOG NUMBER		BTU /HR	VOLTS /HZ	MAX. AMPS	MAX. TEMP	DIMENSIONS			SHIP WGT LBS.
MILD STEEL	STAINLESS STEEL					H	W	D	
IQ1200VS-126	IQ1200VS-126-SC	1200	120/60	4.5	125°F	22.25	11.51	6.26	42
IQ1200VS-236	IQ1200VS-236-SC	1200	230/60	2.3	125°F	22.25	11.51	6.26	42
IQ1200VS-236	IQ1200VS-236-SC	1200	220/50	2.6	125°F	22.25	11.51	6.26	42
IQ1500VS-126	IQ1500VS-126-SC	1500	120/60	4.7	125°F	22.25	11.51	6.26	42
IQ1500VS-236	IQ1500VS-236-SC	1500	230/60	2.4	125°F	22.25	11.51	6.26	42
IQ1500VS-236	IQ1500VS-236-SC	1500	220/50	2.8	125°F	22.25	11.51	6.26	42
IQ1800VS-126	IQ1800VS-126-SC	1800	120/60	5.2	125°F	22.25	11.51	6.26	42
IQ1800VS-236	IQ1800VS-236-SC	1800	230/60	2.6	125°F	22.25	11.51	6.26	42
IQ1800VS-236	IQ1800VS-236-SC	1800	220/50	3.0	125°F	22.25	11.51	6.26	42

- Quick Features :**
- Closed-loop cooling
 - Digital controller
 - Visual alarm
 - Audible alarm
 - CFC-free
 - 100% Factory tested
 - NEMA 4 available
 - Available in steel & stainless steel



Visit www.jimdray.com for details.

Call us @ 1-972-699-9976

Data subject to change without notice.

Suggested Accessories

- Washdown Hoods** p.425
- N4GK NEMA 4/4X Gasket Kit** p.426
- Ambient Corrosive Package** p.426
- External Alarms Audible & Visual** p.425
- Heating & Low Ambient Packages** p.426
- Remote IQ-X Controller** p.425
- ICENET Remote Control Package** p.426