


## Slim vertical mount air conditioner - 2200 to 3800 BTU

The **IQ2200VS** slim vertical mount air conditioners are used to reduce heat accumulation within enclosures and maintain a safe operating temperature. These units use closed-loop cooling technology, which removes heat without letting outside air into the sealed enclosure. All units feature a digital program-


ble temperature controller with an alarm. The air conditioners feature a rugged 16 GA welded steel, dent resistant cabinet construction. The units have a space saving aesthetic cabinet design. A built-in condensate evaporation package is included. The units are powered by an efficient, quiet and long lasting rotary compres-

sor, with a CFC-free refrigeration system. All units are factory tested and are designed to mount on the side of an enclosure, while maintaining NEMA 12 integrity. Units are ANSI/ASA 61 gray or brushed stainless steel.  
**UL / ULc Listed, NEMA 12 / IP54**  
**Steel units: NEMA 4 w/N4GK kit**  
**SS units: NEMA 4X w/N4GK kit**

AIR FLOW DIAGRAM

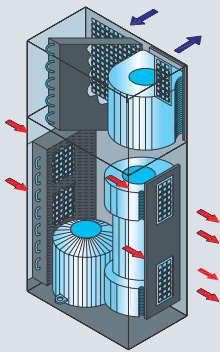

CUT-OUT DRAWING

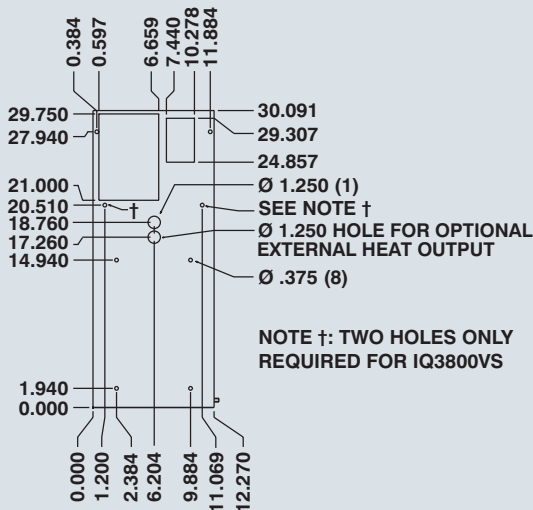

Unit shown above is custom-painted 'Jet Black'. Standard units are painted ANSI 61 gray or brushed stainless steel. Other custom colors, such as beige, are also available.

CATALOG NUMBER		BTU /HR	VOLTS /HZ	MAX. AMPS	MAX. TEMP	DIMENSIONS			SHIP WGHT LBS.
MILD STEEL	STAINLESS STEEL					H	W	D	
IQ2200VS-126	IQ2200VS-126-SC	2200	120/60	6.0	125°F	30.09	12.27	6.34	55
IQ2200VS-236	IQ2200VS-236-SC	2200	230/60	2.9	125°F	30.09	12.27	6.34	55
IQ2200VS-236	IQ2200VS-236-SC	2200	220/50	3.0	125°F	30.09	12.27	6.34	55
IQ3000VS-126	IQ3000VS-126-SC	3000	120/60	8.1	125°F	30.09	12.27	6.34	55
IQ3000VS-236	IQ3000VS-236-SC	3000	230/60	3.9	125°F	30.09	12.27	6.34	55
IQ3000VS-236	IQ3000VS-236-SC	3000	220/50	4.2	125°F	30.09	12.27	6.34	55
IQ3800VS-126	IQ3800VS-126-SC	3800	120/60	7.8	125°F	30.09	12.27	8.34	60
IQ3800VS-236	IQ3800VS-236-SC	3800	230/60	4.2	125°F	30.09	12.27	8.34	60
IQ3800VS-236	IQ3800VS-236-SC	3800	220/50	4.6	125°F	30.09	12.27	8.34	60

### Quick Features :

- Closed-loop cooling
- Digital controller
- Visual alarm
- Audible alarm
- CFC-free
- 100% Factory tested
- NEMA 4 available
- Available in steel & stainless steel



Visit [www.jimdgray.com](http://www.jimdgray.com) for details.

Call us @ 1-972-699-9976

Data subject to change without notice.

## Suggested Accessories

- Washdown Hoods** p.425
- N4GK NEMA 4/4X Gasket Kit** p.426
- Ambient Corrosive Package** p.426
- External Alarms Audible & Visual** p.425
- Heating & Low Ambient Packages** p.426
- Remote IQ-X Controller** p.425
- ICENET Remote Control Package** p.426