

Vertical mount heat exchanger - 29.4 Watts/°F

- Quick Features :**
- Closed-loop cooling
 - CFC-free
 - Quality ball-bearing type fans
 - 100% Factory tested
 - Maintains NEMA 12 integrity



Visit www.jimdgray.com for details.

Call us @ 1-972-699-9976


The **IQ3600HEV** vertical mount heat exchangers are used to reduce heat accumulation within enclosures and maintain a safe operating temperature. These units use closed-loop cooling technology, which removes heat without letting dirty outside air into the sealed enclosure.

The heat exchangers feature a rugged 16 GA welded steel, dent resistant cabinet construction. The units have a space saving aesthetic cabinet design. A hermetically sealed, CFC free heat pipe core provides high efficiency heat transfer. The units have maintenance free, long last-


ing, permanently lubricated ball bearing type fans. All units are factory tested and are designed to mount on the side of an enclosure, while maintaining NEMA 12 integrity. Units are ANSI/ASA 61 gray or brushed stainless steel. **UL / ULc Listed NEMA 12 / IP54**



AIR FLOW DIAGRAM

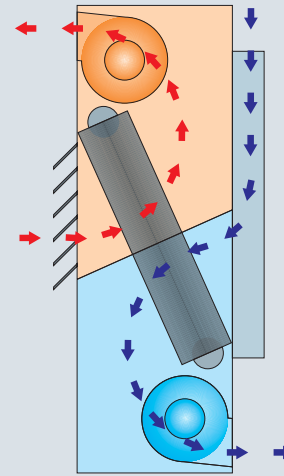

CUT-OUT DRAWING

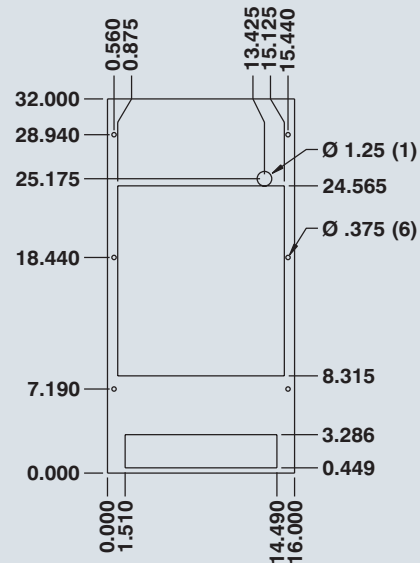

Unit shown above is custom-painted 'Jet Black'. Standard units are painted ANSI 61 gray or brushed stainless steel. Other custom colors, such as beige, are also available.

CATALOG NUMBER		WATTS /°F	VOLTS /HZ	MAX. AMPS	MAX. TEMP	DIMENSIONS			SHIP WGHT LBS.
MILD STEEL	STAINLESS STEEL					H	W	D	
IQ3600HEV-126	IQ3600HEV-126-SC	29.4	120/60	5.40	150°F	32.00	16.00	6.00	43
IQ3600HEV-126	IQ3600HEV-126-SC	29.4	110/50	6.00	150°F	32.00	16.00	6.00	43
IQ3600HEV-236	IQ3600HEV-236-SC	29.4	230/60	2.70	150°F	32.00	16.00	6.00	43
IQ3600HEV-236	IQ3600HEV-236-SC	29.4	220/50	3.00	150°F	32.00	16.00	6.00	43

Data subject to change without notice.