

Vertical mount air conditioner - 8000 to 10000 BTU

Quick Features :

- Closed-loop cooling
- Digital controller
- Visual alarm
- Audible alarm
- CFC-free
- 100% Factory tested
- NEMA 4 available
- Available in steel & stainless steel



Visit www.jimdgray.com for details.

Call us @ 1-972-699-9976


The **IQ8000V16HA** vertical mount air conditioners are used to reduce heat accumulation within enclosures and maintain a safe operating temperature. These units use closed-loop cooling technology, which removes heat without letting outside air into the sealed enclosure. All units feature a digital programma-

ble temperature controller with an alarm. The air conditioners feature a rugged 16 GA welded steel, dent resistant cabinet construction. The units have a space saving aesthetic cabinet design. A built-in condensate evaporation package is included. The units are powered by an efficient, quiet and long lasting rotary compres-


sor, with a CFC-free refrigeration system. All units are factory tested and are designed to mount on the side of an enclosure, while maintaining NEMA 12 integrity. Units are ANSI/ASA 61 gray or brushed stainless steel.
UL / ULc Listed, NEMA 12 / IP54
Steel units: NEMA 4 w/N4GK kit
SS units: NEMA 4X w/N4GK kit



AIR FLOW DIAGRAM

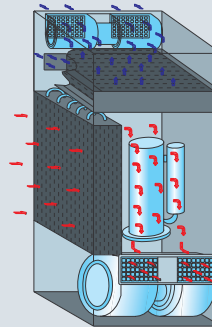

CUT-OUT DRAWING

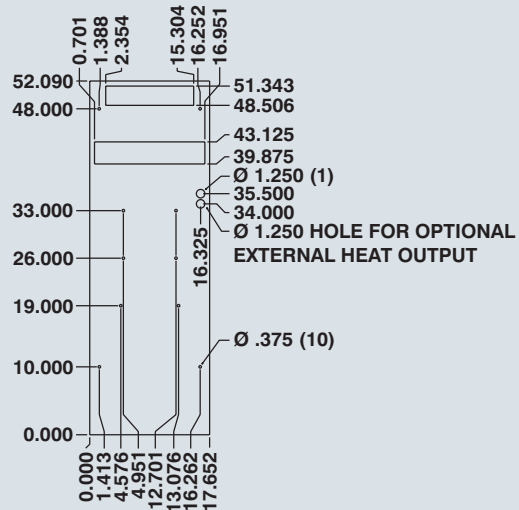

Unit shown above is custom-painted 'Jet Black'. Standard units are painted ANSI 61 gray or brushed stainless steel. Other custom colors, such as beige, are also available.

CATALOG NUMBER		BTU /HR	VOLTS /HZ	MAX. AMPS	MAX. TEMP	DIMENSIONS			SHIP WGT LBS.
MILD STEEL	STAINLESS STEEL					H	W	D	
† IQ8000V16HA-126	IQ8000V16HA-126-SC	8000	120/60	15.2	135°F	52.09	17.65	10.34	135
† IQ8000V16HA-236	IQ8000V16HA-236-SC	8000	230/60	7.3	135°F	52.09	17.65	10.34	135
† IQ8000V16HA-236	IQ8000V16HA-236-SC	8000	220/50	7.4	135°F	52.09	17.65	10.34	135
IQ10000V-126	IQ10000V-126-SC	10000	120/60	17.4	125°F	52.09	17.65	10.34	135
IQ10000V-236	IQ10000V-236-SC	10000	230/60	7.8	125°F	52.09	17.65	10.34	135
IQ10000V-236	IQ10000V-236-SC	10000	220/50	7.5	125°F	52.09	17.65	10.34	135
IQ12000V-126	IQ12000V-126-SC	12000	120/60	19.4	125°F	52.09	17.65	10.34	135
IQ12000V-236	IQ12000V-236-SC	12000	230/60	8.6	125°F	52.09	17.65	10.34	135
IQ12000V-236	IQ12000V-236-SC	12000	200/60	8.7	125°F	52.09	17.65	10.34	135

† Denotes units which are designed for high ambient temperature applications.

Data subject to change without notice.

Suggested Accessories

- Washdown Hoods p.425
- N4GK NEMA 4/4X Gasket Kit p.426
- Ambient Corrosive Package p.426
- External Alarms Audible & Visual p.425
- Heating & Low Ambient Packages p.426
- Remote IQ-X Controller p.425
- ICENET Remote Control Package p.426